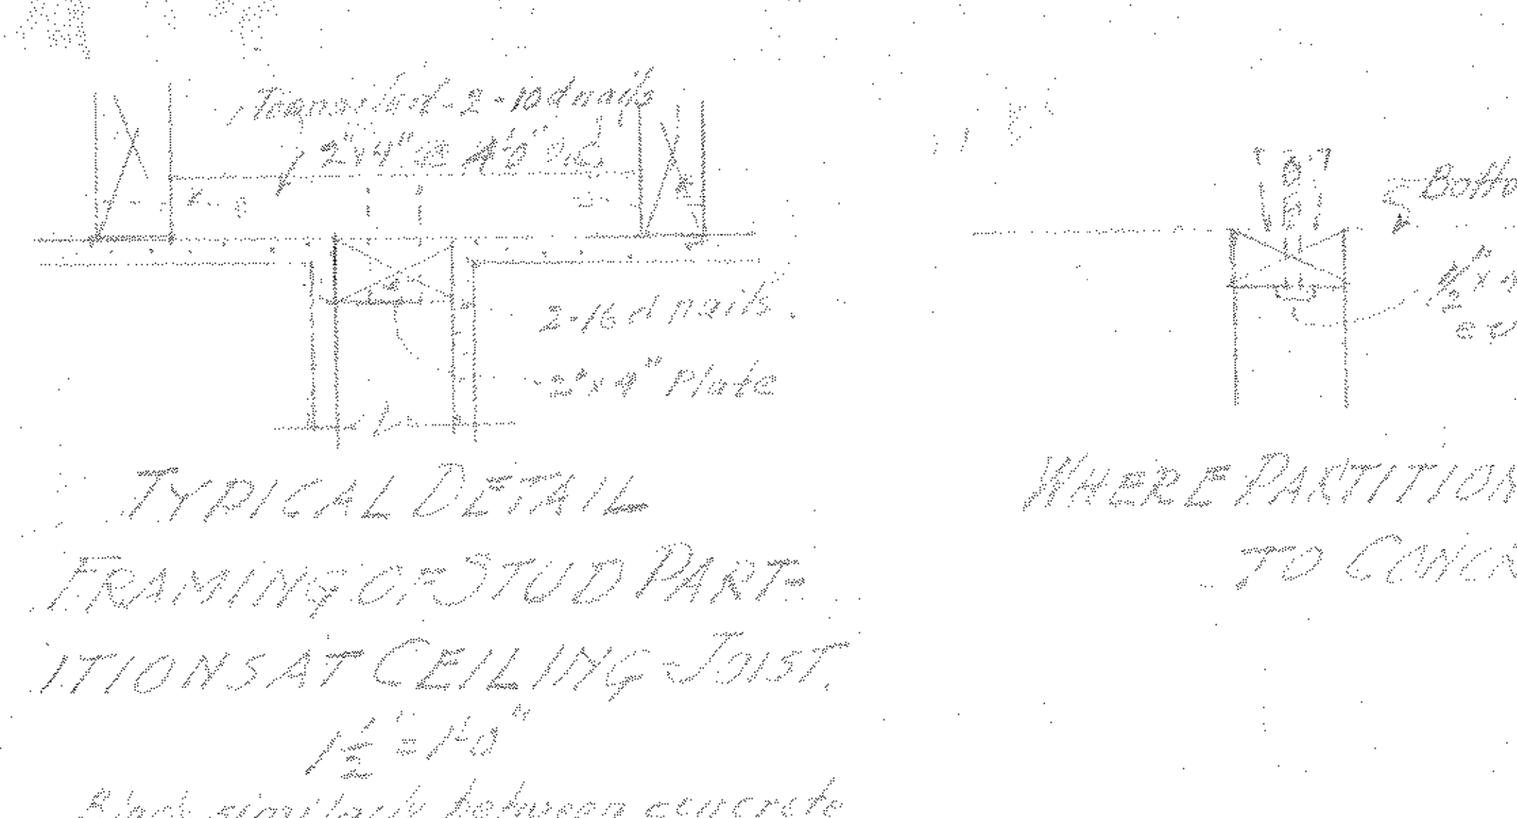

SCHEDULE OF WINDOWS

Mark	Size	Glazing	Notes.
A	3'6"x7'5½"	D.S. Clear Gl.	"Donovan" awning type steel sash
B	3'3"x6'0"	" " "	" " " " "
C	3'6"x6'0"	" " "	" " " " "
D	1'7¾"x3'3⁹⁄₁₆"	" " "	Cottage type steel casements - Open out.
E	3'0"x1'9¼"	Obscure Gl.	O.P. wood sash trans; Hinged at bottom, Open in.
F	4'10¾"x1'9¼"	Rn. Wire Gl.	Industrial type steel sash
G	3'8"x3'5¾"	" " "	" " " "
H	4'10¾"x8'6¾"	" " "	" " " " } Details Sh.#2
K	12'6¾"x8'6¾"	" " "	" " " }
J	3'8"x1'9¼"	Obscure Gl.	" " " "

SCHEDULE OF DOORS

No.	Size	Notes.
1	5'4"x7'0"x1¾"	With Tran. - Sugarpine - Fitted with panic bolts & door checks - Det. Sh#2.
2	3'2"x7'0"x1¾"	20" Trans. - O.P. - Obscure glass in upper panel - Door checks.
3	3'0"x7'0"x1¾"	— — " " No glass.
4	Do.	Same as #3, except double-acting.
5	3'6"x7'0"	Soule Steel Co. - Tubular entrance door; Type "D". Door checks. Polished wire gl.
6	2'0"x6'6"x1⅜"	O.P. 2 Panel.
7	2'4"x7'0"x1⅜"	O.P. 2 Panel.
8	2'8"x7'0"x1⅜"	O.P. 2 Panel - Door check.
9	3'2"x7'0" Opn.	No door. - Wood jambs & metal bullnose trim.
10	5'0"x7'0"	Soule Steel Co. - Same as #5 - Door check.
11	5'0"x7'0"x1¾"	Same pattern as #1, - No transom.
12	5'0"x7'0"	Same as #5.
13	3'6"x7'0"	" " " except for framing around door. Rn. wire gl.

Rn. Wire glass in 2'6" windows on stair landing.

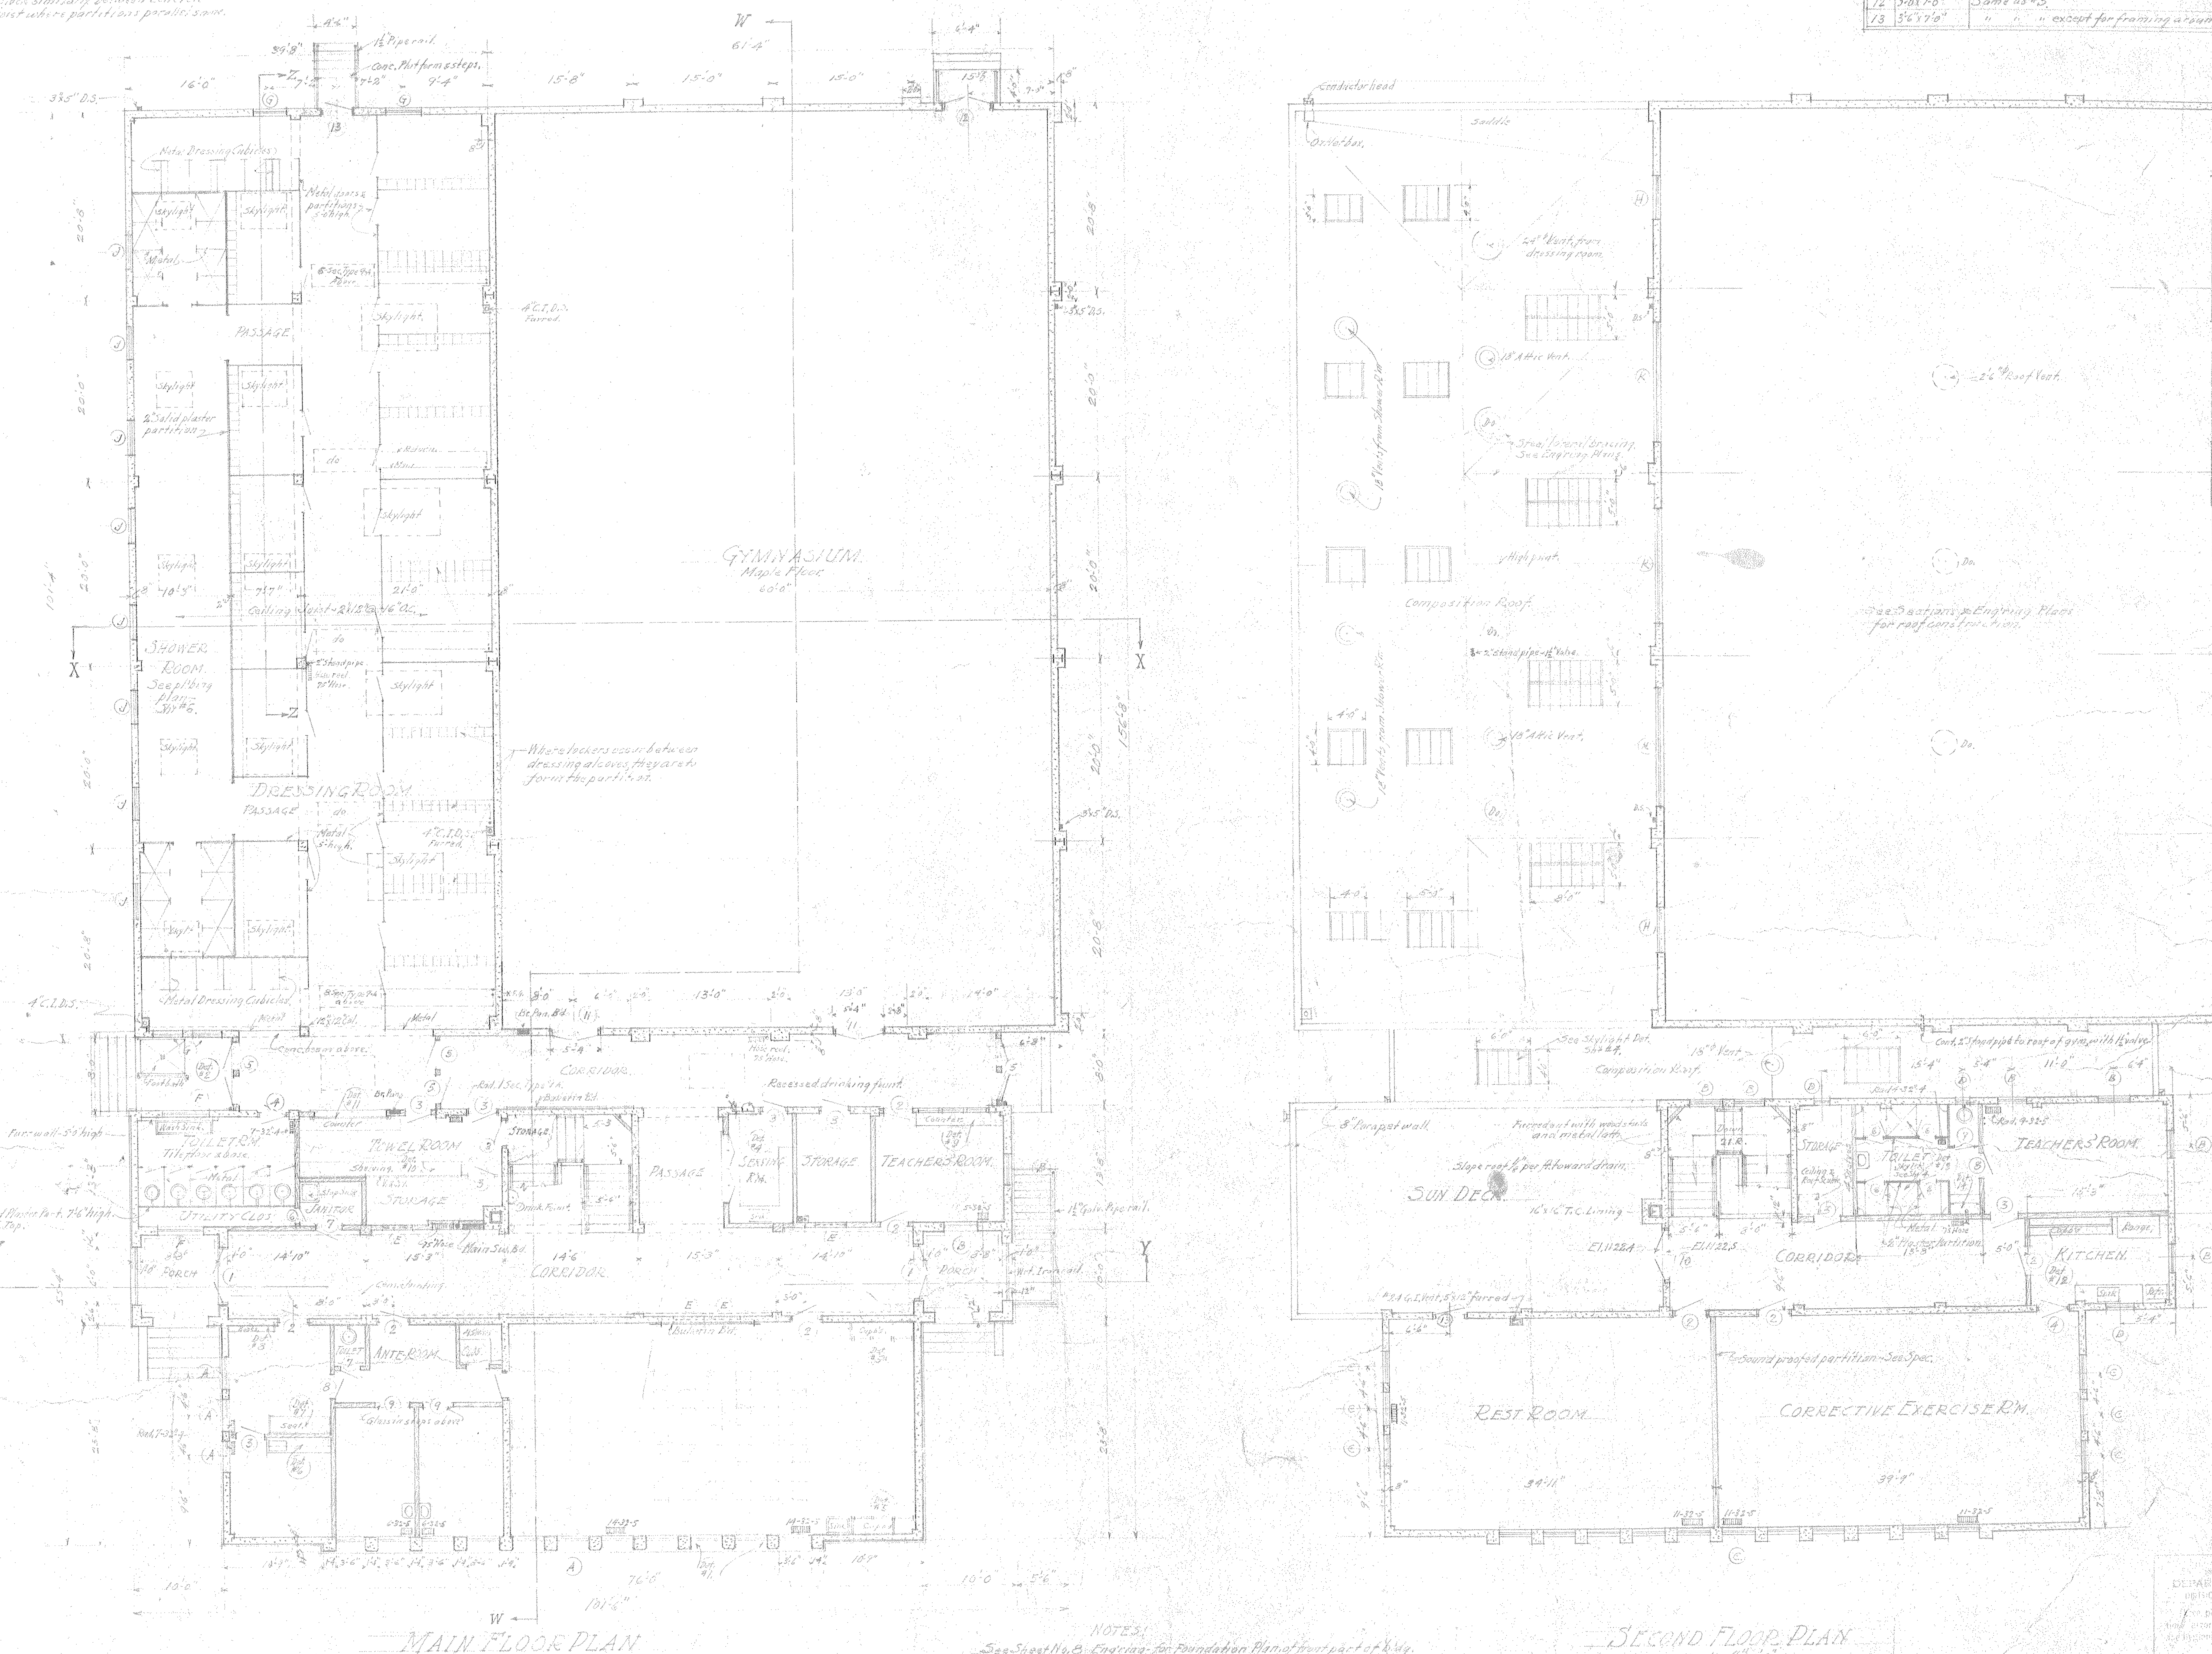

MAIN FLOOR PLAN
Scale - ⅛" = 1'-0"

NOTES:
See Sheet No. 8 Eng'r'ing - for Foundation Plan of front part of bldg.
" " " 13 " " " " " gymnasium part.
" " " 3 for Plot Plan.

SECOND FLOOR PLAN
Scale - ⅛" = 1'-0"

WINDOW MULLIONS IN 8" WALLS
Identical for all cases.
½" = 1'-0"

STATE OF CALIFORNIA - DEPARTMENT OF PUBLIC WORKS
DIVISION OF ARCHITECTURE
APPROVED AS TO SAFETY 9-28-'34
Appl. No. 521

These plans have been checked for functional arrangement, educational requirements and hygienic conditions.
Approved 8-11-34

Harry L. Pierce
ARCHITECT

Geo. J. Fosdyke
STRUC. ENG'R

FLOOR PLANS
GIRLS' GYMNASIUM
CHAFFEY JUNIOR COLLEGE
ONTARIO, CALIFORNIA.
HARRY L. PIERCE, ARCHITECT - LIC. #771
1443 MT. PLEASANT ST. - LOS ANGELES - PHONE - AL5598
GEORGE J. FOSDYKE - STRUC. ENG'R
112 N. MAIN ST. LOS ANGELES - PHONE VA-[illegible]

Date July '34
Revised
Eng. Job No.
Sheet No. 1

PD24 #167